
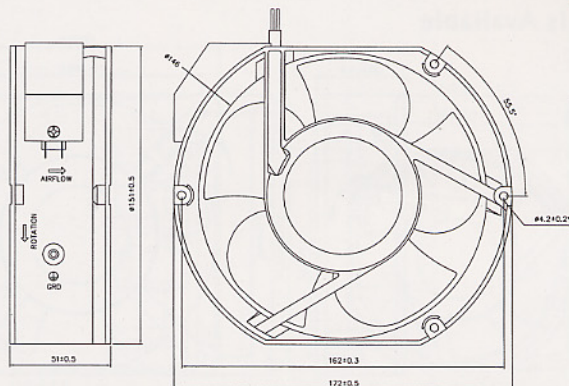


SIZE: 172x150x50mm

Bearing Type:

Ball / Sleeve Bearing

Leader Wire Or Terminal Is Available



Specifications

Specifications are subject to change without notice




Model No.	Bearing	Rated Voltage Vac	Frequency Hz	Input Current A	Input Power W	Speed R.P.M.	Max. Air Flow CFM	Static Pressure InchAq	Noise dB-A	Weight g
1725HA1SAT(L)	Sleeve	115	50/60	0.43/0.48	39.3/59.6	2700/3000	194.6/218.2	0.31/0.51	52.3/54.7	930
1725HA1BAT(L)	Ball									
1725HA2SAT(L)	Sleeve	230	50/60	0.23/0.27	38.4/47.9	2700/3000	196.0/217.7	0.29/0.49	51.3/53.9	
1725HA2BAT(L)	Ball									

SIZE: ϕ 172x51mm

Bearing Type:

Ball / Sleeve Bearing

Leader Wire Or Terminal Is Available

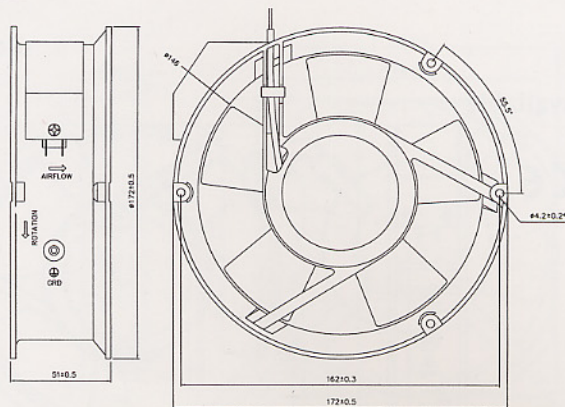

Specifications

Specifications are subject to change without notice

Model No.	Bearing	Rated Voltage Vac	Frequency Hz	Input Current A	Input Power W	Speed R.P.M.	Max. Air Flow CFM	Static Pressure InchAq	Noise dB-A	Weight g
A1175HBT	Ball	115	50/60	0.22/0.23	25/27	2800/3200	203/239	0.62/0.69	51/58	908
A2175HBT	Ball	230	50/60	0.11/0.11	25/26	2800/3200	203/239	0.62/0.69	51/58	