


15W Single Output Switching Power Supply

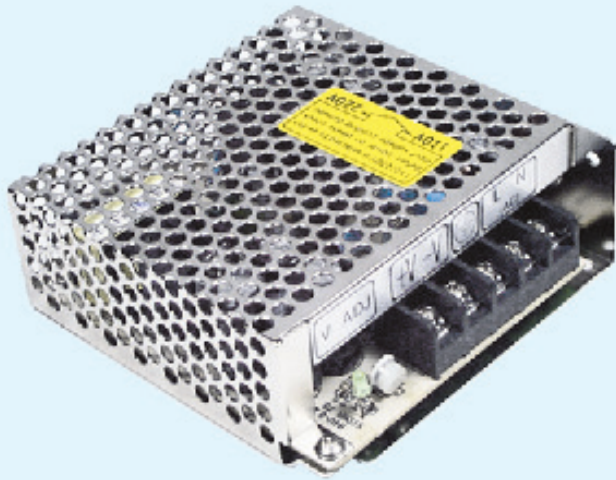

CASE: 905

99x 97x 36 mm

- AC input range selectable by switch
- Protections: Short circuit / Over load
- Cooling by free air convection
- 100% full load burn-in test
- Low cost, high reliability
- 1 year warranty

AC input voltage range	85~132VAC/ 170~264VAC selectable by switch
AC inrush current	Cold start, 15A at 115VAC, 30A at 230VAC
DC adjustment range	±10% rated output voltage
Over load protection	105%~150% fold back current limiting, auto-recovery
Setup, rise, hold up time	200ms, 100ms, 30ms at full load and 230VAC
Withstand voltage	I/P-O/P:1.5KVAC, I/P-FG:1.5KVAC, 1minute
Working temperature	0~50°C@100%, -10°C@80%, 60°C@60% load
Safety standards	Design refer to UL1012
EMC standards	Design refer to FCC part 15 J
Connection	5P / 9.5mm pitch terminal block
Packing	0.31kg; 45pcs / 15.0kg / 0.90CUFT

Stock No.	Model No.	Output	Tol.	R&N	Effi.
10001	S-15-5	5V, 0~3.0A	±2%	50mV	65%
10002	S-15-12	12V, 0~1.3A	±1%	50mV	68%
10003	S-15-24	24V, 0~0.7A	±1%	100mV	72%