


115W Triple Output Switching Power Supply

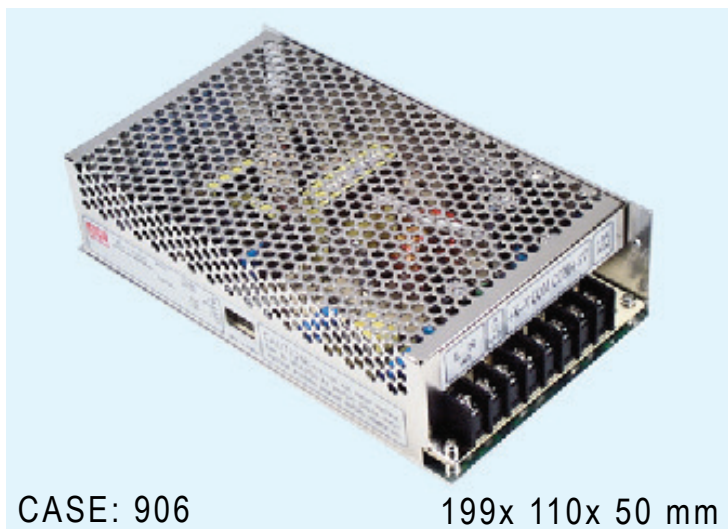

CASE: 906

199x 110x 50 mm

- AC input range selectable by switch
- Protections: Short circuit / Over load / Over voltage
- Fixed switching frequency at 115KHz
- No min. load requirement
- Approvals: UL / CUL / TUV / CB / CE
- Cooling by free air convection
- All outputs can be adjusted
- 2 years warranty

AC input voltage range 88~132VAC/ 176~264VAC selectable by switch

DC adjustment range $\pm 5\%$ of each rated output voltage

Over load protection 105%~150% hiccup mode, auto-recovery

Over voltage protection 115%~135% rated output voltage of each channel

Setup, rise, hold up time ... 800ms, 10ms, 40ms at full load and 230VAC

Working temperature $-10\sim 60^{\circ}\text{C}$ (refer to output derating curve)

Safety standards UL60950-1, TUV EN60950-1 approved

EMC standards EN55022 class B, EN61000-3-2,3

EN61000-4-2,3,4,5,6,8,11, ENV50204

Connection 8P/ 9.5mm pitch terminal block

Packing 0.87kg ; 16pcs / 14.9kg / 0.95CUFT

Stock No.	Model No.	Output	Tol.	R&N	Effi.	Max.
10311	T-115	5V, 0~10A	$\pm 2\%$	80mV	73%	114W
		3.3V, 0~12A	$\pm 2\%$	80mV		
		12V, 0~2.0A	$\pm 2\%$	80mV		