


# 40W Triple Output Switching Power Supply

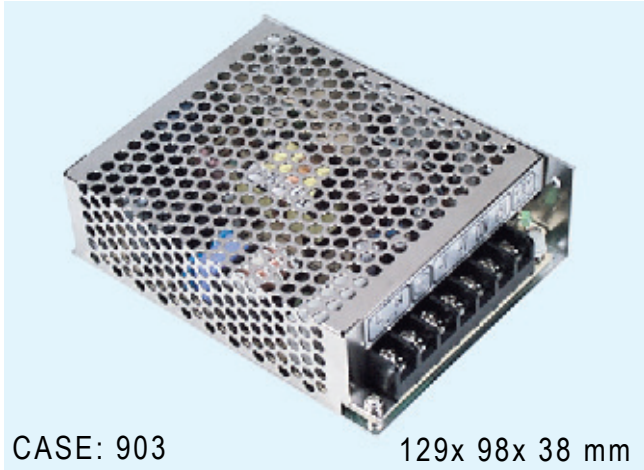

- Universal AC input / Full range
- Protections: Short circuit / Over load / Over voltage
- Fixed switching frequency at 40KHz
- Approvals: CSA / CE / NRTL
- Cooling by free air convection
- 100% full load burn-in test
- 2 years warranty

AC input voltage range..... 85~264VAC; 120~370VDC  
 AC inrush current..... Cold start, 20A at 115VAC, 40A at 230VAC  
 DC adjustment range..... CH1: -5~+10% rated output voltage  
 Over load protection..... 105%~150% hiccup mode, auto-recovery  
 Over voltage protection..... CH1: 115%~135% rated output voltage  
 Setup, rise, hold up time.... 800ms, 50ms, 60ms at full load and 230VAC  
 Withstand voltage..... I/P-O/P:3KVAC, I/P-FG:1.5KVAC, 1minute  
 Working temperature..... 0~50°C@100%, -10°C@80%, 60°C@60% load  
 Safety standards..... CSA60950-1, (UL60950-1, IEC60950-1, EN60950-1) approved  
 EMC standards..... EN55022 class B, EN61000-3-2,3  
 EN61000-4-2,3,4,5,6,8,11, ENV50204  
 Connection..... 7P/ 9.5mm pitch terminal block with cover  
 Packing..... 0.44kg ; 30pcs / 14.7kg / 0.86CUFT

Stock No.	Model No.	Output	Tol.	R&N	Effi.	Max.
10271	T-40A	5V, 0.6~5.0A	±2%	100mV	72%	42W
		12V, 0.2~3.0A	±6%	120mV		
		-5V, 0.1~1.0A	±8%	100mV		
10272	T-40B	5V, 0.6~5.0A	±2%	100mV	72%	45W
		12V, 0.2~3.0A	±6%	120mV		
		-12V, 0.1~1.0A	±8%	120mV		
10273	T-40C	5V, 0.6~5.0A	±2%	100mV	72%	45W
		15V, 0.2~2.0A	±6%	120mV		
		-15V, 0.1~1.0A	±6%	120mV		